



SPACE S

STANDARD

VIDEO CONFERENCE



ISOLATION





LOW, MEDIUM
& HIGH TONES

A peaceful and serene workspace,
allowing maximum focus and minimal
distraction. Now with video conference.

MUTE.

SHAPE AND DIMENSIONS mm

+/- 3 mm

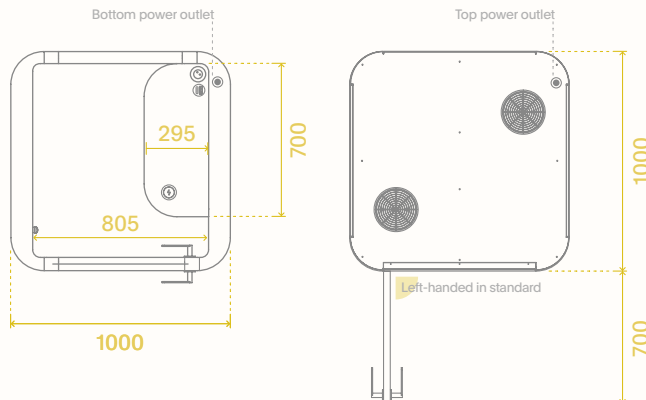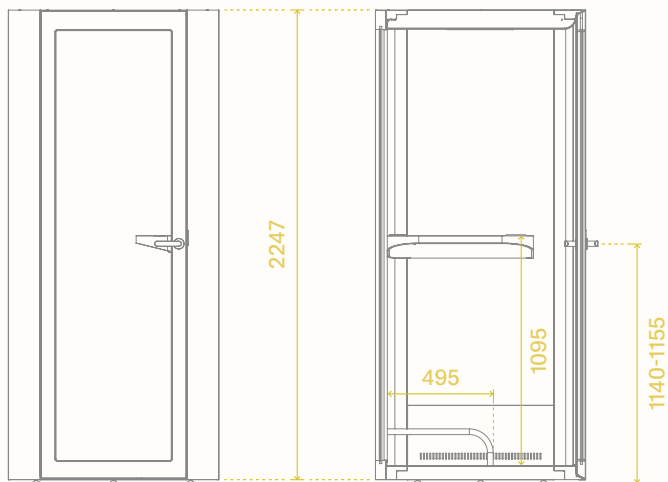

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	805	887	2080

WEIGHTS kg

NET	GROSS
347	414 including cardboards and packaging parts

COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
- Felt
- Isolating materials
- Metal covers
- Plywood
- Soundproof glass


USAGE

- Open space
- Call center
- Library
- Reception
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

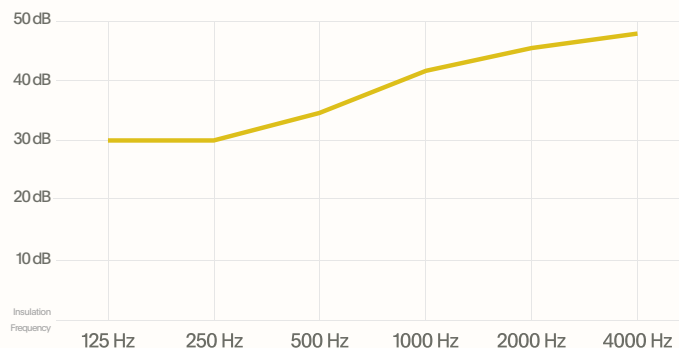


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

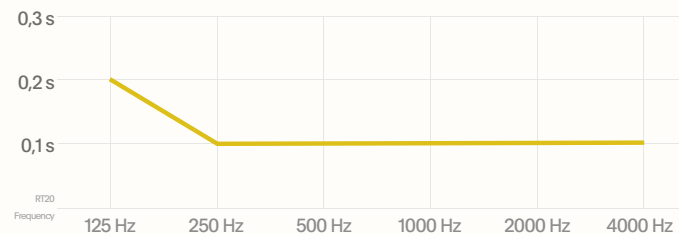

PACKING

- Space S is delivered in 2 cardboard boxes:

W 2335 x D 1160 x H 1310 mm



TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W
Working: 16 W (fans, LEDs)
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 35 W
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 63 m³/ hour



Fan emitted noise level in L_{Aeq}
Inside ≤ 39 db
Outside ≤ 35 dB



The level of outside noise measured at a distance of 1.5 meters. The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING



Power: 6 W
Brightness: 307 lx (615 lm at source)
Light color temp.: 4000K



Fans and light activated by occupancy sensor

GLASS PROPERTIES PER EN 410



Light transmission: 87
Light reflection: 8
Solar energy transmittance: 70
Reflection of solar radiation: 7
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard
Quality management system of ISO 9001
Environmental management system of ISO 14001
FSC Certificate No. C161812

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



Electric socket¹



Graphite carpet



Wall hook max load 5 kg



Wall-mounted tabletop

OPTIONAL ADD-ONS



USB A+C port² integrated in the tabletop



Induction charger² integrated in the tabletop



LAN connection³ with 10 m wire



Light and ventilation control panel



Height-adjustable stool with footrest



Wall-mounted back support



Integrated wheels for easy relocation



Right-handed door opening

OPTIONAL EQUIPMENT'S DIMENSIONS mm



Height-adjustable stool with footrest in Remix3

12 kg Total weight



✓ Floor-integrated



Height fixed wall-mounted back support in Remix3

4 kg Total weight in kg

850 mm Height from a pod's floor





¹ Socket type E is installed as standard. Other electrical type should be requested.

² Electric socket, USB ports and induction charger are available only in black.

³ An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

SHAPE AND DIMENSIONS mm

+/- 3 mm

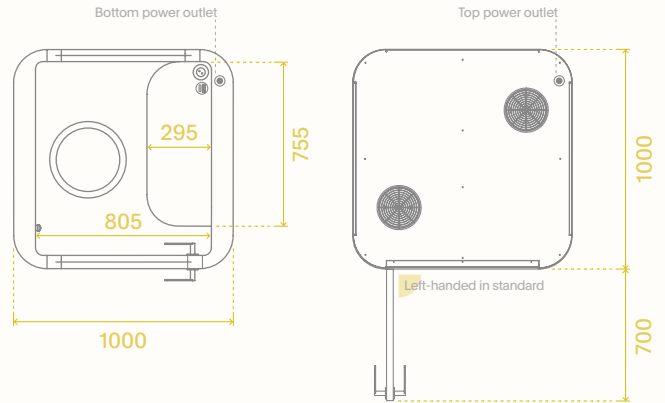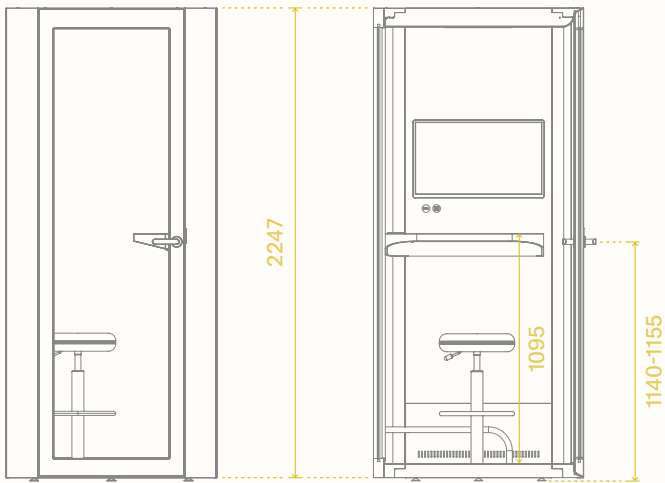

DIMENSIONS mm

	WIDTH	DEPTH	HEIGHT
External	1000	1000 +700 mm with open door	2247 +200 mm for ventilation +20 mm for leveling
Internal	805	887	2080

WEIGHTS kg

NET	GROSS
360	427 including cardboards and packaging parts

COMPOSITION

The construction of Space S is the effect of work of our acoustics, technology and design departments. Walls of Space S pod are built from several layers of meticulously chosen materials responsible for one of the highest results of sound isolation and sound absorption inside the pod.

- Absorbing materials
- Felt
- Isolating materials
- Metal covers
- Plywood
- Soundproof glass


USAGE

- Open space
- Call center
- Library
- Reception
- Breakout area
- Other public spaces (including railway stations and airports)


CARE

- Keep the product dry
- Vacuum and clean regularly
- Follow the assembly instructions and terms of use

AVERAGE SOUND INSULATION

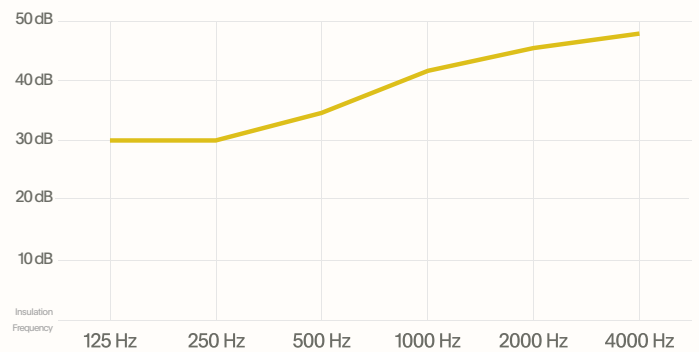


RT20 PERFORMANCE INSIDE PER PN-EN ISO 354:2005

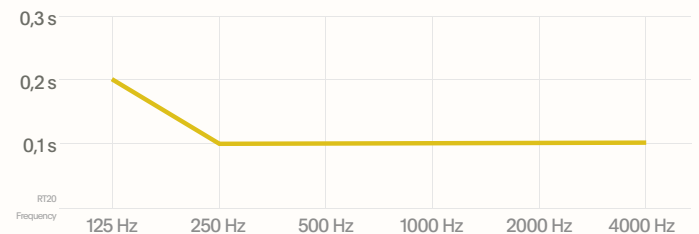

PACKING

- Space S is delivered in 2 cardboard boxes:

W 2335 x D 1160 x H 1310 mm



TECHNICAL SPECIFICATIONS

POWER CONSUMPTION



Standby: 4,5 W
Working: 16 W (fans, LEDs)
CE ✓RoHS 3 m cable



Max. power supply (exc. plugged receivers): 35 W
Power supply voltage: 220-240 / 100-120 VAC, 50-60 Hz
Supply voltage for ventilation, lighting and addons: 12 - 24 V DC

FANS PERFORMANCE



Airflow: 63 m³/ hour



Fan emitted noise level in L_{Aeq}
Inside ≤ 39 db
Outside ≤ 35 dB



The level of outside noise measured at a distance of 1.5 meters. The Space series achieves one of the best results on the market.

External fan noise is comparable to one in typical open offices (<45 dB) and will create an acoustic background for employees nearby.

LIGHTING



Power: 6 W
Brightness: 307 lx (615 lm at source)
Light color temp.: 4000K



Fans and light activated by occupancy sensor

GLASS PROPERTIES PER EN 410



Light transmission: 87
Light reflection: 8
Solar energy transmittance: 70
Reflection of solar radiation: 7
Total solar energy transmittance: 76

HEALTH AND SUSTAINABILITY COMPLIANCES



Formaldehyde and VOC safe: EU E1 Standard
Quality management system of ISO 9001
Environmental management system of ISO 14001
FSC Certificate No. C161812

STANDARD EQUIPMENT



Ventilation system



LED Light



Occupancy sensor



Electric socket¹



Graphite carpet



Wall hook max load 5 kg



Wall-mounted tabletop



USB and HDMI ports for video²



USB A+C port²



Height-adjustable stool with footrest



Wall-integrated monitor bracket

OPTIONAL ADD-ONS



LAN connection³ with 10 m wire



Light and ventilation control panel



Integrated wheels for easy relocation



Right-handed door opening

EQUIPMENT DIMENSIONS mm



Height-adjustable stool with footrest in Remix3

12 kg Total weight



✓ Centrally floor-integrated



Wall-integrated bracket with VESA 75 & 100 plate

24" Recommended screen size

27" Maximum screen size




¹ Socket type E is installed as standard. Other electrical type should be requested.

² Electric socket, HDMI and USB ports are available only in black.

³ An optional 10 m LAN cable is set with the power cord and can be led out of the pod's floor (standard) or ceiling (option). Please make a selection while ordering.

FINISHES

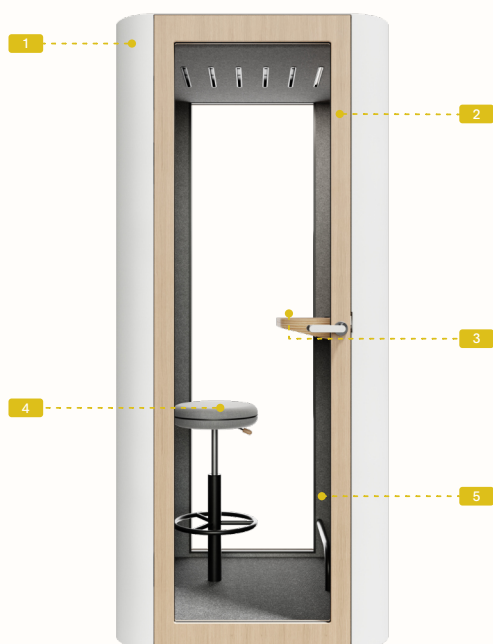

1 EXTERNAL WALLS AND ROOF PAINT COLOURS

STANDARD	Snow White Ultra Matt RAL 9003	
	Powder Grey Ultra Matt RAL 7035	New York Grey Ultra Matt NCS S 3000-N
EXTRA	Pepper Grey Ultra Matt RAL 7012	Panther Black Ultra Matt RAL 9005
	Ceramic Red Ultra Matt NCS S 4050-Y70R	Dusk Blue Ultra Matt NCS S 4010-B50G
	St. Tropez Yellow Ultra Matt RAL 1018	Whiteboard White Glossy Anti-graffiti coating
	Custom colour From RAL palette	

2 EXTERNAL FRAME LAMINATES & VENEERS

STANDARD	Snow White NCS S 0500-N	
	Powder Grey NCS S 1502-G	New York Grey NCS S 3000-N
EXTRA	Dusk Blue NCS S 4010-B50G	Ceramic Red NCS S 4050-Y70R
	Whiteboard White Glossy 9417-HW	Black Premium Anti-fingerprint 0720
	Maple Wood	Oak Wood

3 INTERNAL TABLETOP LAMINATES & VENEERS

STANDARD	Snow White NCS S 0500-N	
	Powder Grey NCS 1502-G	New York Grey NCS S 3000-N
EXTRA	Dusk Blue NCS S 4010-B50G	Ceramic Red NCS S 4050-Y70R
	Grey Premium Anti-fingerprint 0725	Black Premium Anti-fingerprint 0720
	Maple Wood	Oak Wood

4 INTERNAL STOOL/BACK SUPPORT FABRIC

KVAADRAT REIMIK 3	0422	0452	0566	0906
	0242	0123	0136	0133
	0152	0173		

5 INTERNAL FELT LININGS

Beige	Grey
Dark Grey	